



Self-propelled scissor lift (diesel) :: SKYJACK SJ6832 RT

SPECIFICATION



A. Work Height	11.8 m
B. Raised Platform Height	9.8 m
C. Lowered Platform Height	1.4 m
D. Overall Width	1.7 m
E. Overall Length	2.7 m
F. Stowed Height (Rails Up)	2.5 m
G. Stowed Height (Rails Down)	1.8 m
H. Platform Width (Inside Dimension)	1.4 m
I. Platform Length (Inside Dimension)	2.5 m
Extension Deck	1.5 m
Ground Clearance	0.2 m
Wheelbase	2.0 m
Weight	3475 kg
Gradeability	40%
Turning radius (Inside)	1.5 m
Turning radius (Outside)	4.0 m
Lift Time (With Rated Load)	39 sec.
Drive Speed (Stowed)	6.3 km/h
Drive Speed (Raised)	0.6 km/h
Maximum Drive Height	Full Height
Capacity (Overall)	454 kg
Maximum # of Persons	2

STANDARD FEATURES

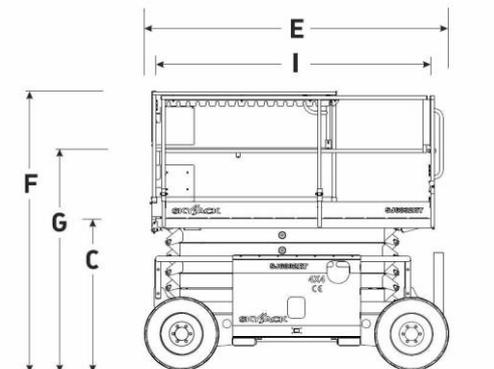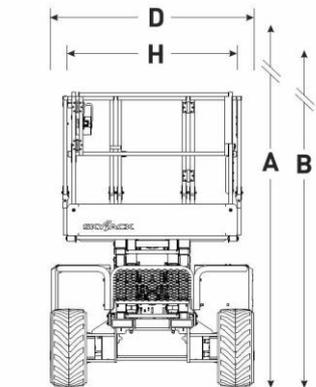

- Drivable at full height with roll out deck fully extended
- Crossover symmetrical 4WD
- Multiple wet disc spring applied hydraulic release brakes
- 1,5 roll out extension deck
- 24hp Kubota Diesel engine
- 90 degrees swing out engine tray
- Analog control system
- Up to 50% gradeability
- Colour coded and numbered wiring system
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Solid rubber, non-marking tyres
- Operator horn
- Hinged railing system
- Full height spring hinged gate at rear of unit
- Lanyard attachment point
- Scissor guards

OPTIONS

- Diesel scrubber
- Independent /auto levelling outriggers
- Flashing light
- 2.0kW hydraulic generator
- Solid rubber non marking tyres

This brochure is for illustrative purpose only and based on the latest information at the time of printing. The manufacturer reserves the right to make changes the specifications, standard and optional equipment at any time, without prior notice.